

Puck Lighting Installation Instructions

Do not plug the power cord into the wall until all connections are made.


OPEN LIGHTS, REMOVE SURFACE MOUNT RINGS AND INSTALL THE LIGHTS IN THE HOLES



Turn light over; push light core out of surface mounting ring. Complete separation of light and mounting ring. Discard mounting ring leaving you the light with two wires. Install light(s) with wires pointing up through the holes. If needed, gently bend tabs outward to adjust tension.

CONNECT ALL THE WIRES

Power Supply
Linking Cable
From transformer to first connecting cable

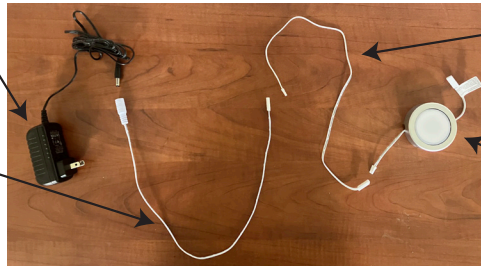

Connecting Cable
From linking cable to first light (One connecting cable is included with each puck light.)
Puck Light(s) If cabinet has more than one light, use the connecting cable from the second light to string the pucks together.

Now that all connections are made, you can plug the power supply into your wall outlet.